





Installation

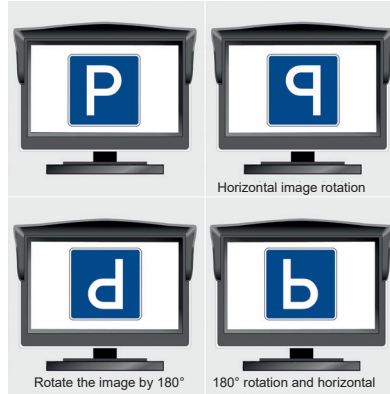

- 1 - Screen
- 2 - (+) button to adjust the selection
- 3 - Mode button to select brightness, contrast, saturation, Picture rotation and reset
- 4 - (-) button to adjust the selection
- 5 - Fixture for the adhesive bracket and sucker bracket



Connections



- 1 - Connect the red wire to 12V ignition (ACC) or reversing signal
- 2 - Connect the black wire to ground
- 3 - Power connector
- 4 - Yellow RCA connector, video input 1
- 5 - White RCA connector, video input 2

Note: The monitor will turn on automatically as soon as a video signal is detected on input 1 or 2. The input 2 has priority and can be used for reverse driving cameras for instance.

Vejledning til TS-TFT4.35 & TS-TFT5

