


# FOIL COMBI RADIO

AM/FM and DAB

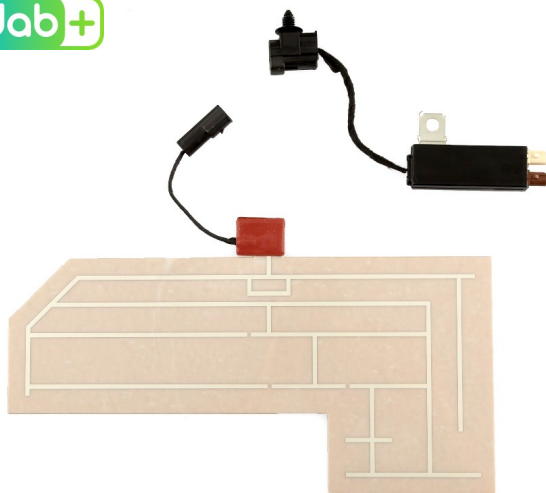



## EN

Foil antenna with associated amplifier for the receptions of radio signals in the AM/FM and DAB frequencies. Thanks to its exclusive design and to its high-quality materials, it can be install on plastic or fiberglass surface. Suitable for mounting on campers, motorhomes, caravans and commercial veicles.

## IT

*Antenna a foglio con amplificatore dedicato per la ricezione dei segnali radio nelle frequenze AM, FM e DAB. Grazie al design esclusivo e all'elevata qualità dei materiali può essere facilmente applicata su superfici in plastica e vetroresina. Particolarmente adatta per l'installazione su Camper, Caravan e Veicoli Commerciali.*

### Dimensions - Dimensioni

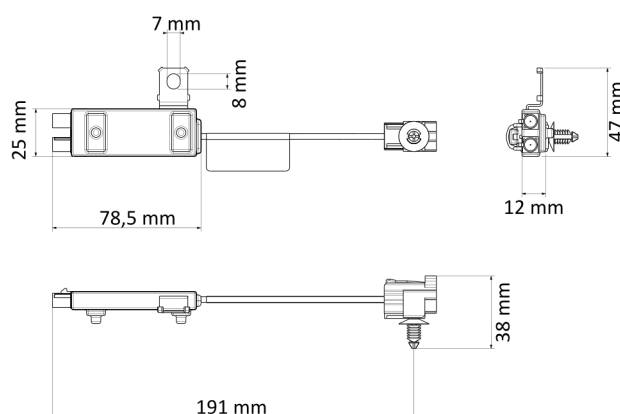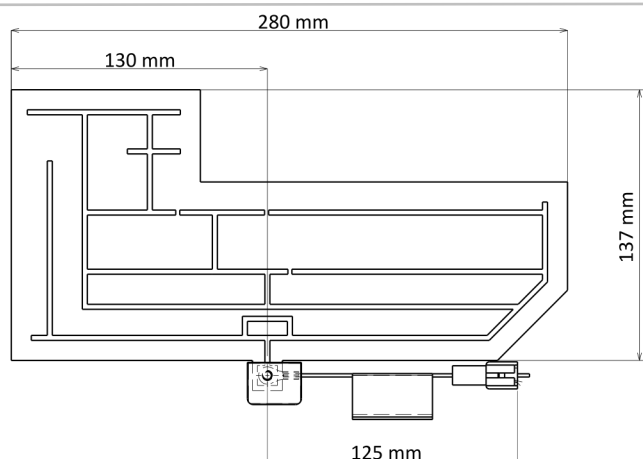

|                                      | AM/FM                                                | DAB              |
|--------------------------------------|------------------------------------------------------|------------------|
| Frequenza - Frequency                | AM: 144 - 1710 kHz / FM: 76 - 108 MHz                | 174 - 240 MHz    |
| Power supply - Alimentazione         | 12V Phantom                                          | 12V Phantom      |
| Consumption - Consumo                | 60 mA max                                            | 60 mA max        |
| Impedance - Impedenza                | 50 $\Omega$                                          | 50 $\Omega$      |
| Gain - Guadagno                      | --                                                   | 8 dBi            |
| VSWR - ROS                           | FM: 2,1:1                                            | 1,7:1            |
| Noise figure - Figura di rumore      | FM: 2,6 dB                                           | 2,7 dB           |
| Polarization - Polarizzazione        | Linear Vertical                                      |                  |
| Connectors - Connettori              | FAKRA Male WHITE                                     | FAKRA Male BROWN |
| Mounting - Montaggio                 | Foil: internal adhesive / Amplifier: screw           |                  |
| Tightening torque - Coppia Serraggio | Amplifier screw: $5 \pm 0,5$ Nm                      |                  |
| Weight - Peso                        | Amplifier: 34 g / Foil: 22 g                         |                  |
| Temperature - Temperatura            | Working: - 40° C to + 85 / Storage: -40° C to +95° C |                  |
| IP grade protection - Protezione IP  | Amplifier: IP67                                      |                  |

Technical specification subject to change without prior notice - Le specifiche tecniche possono essere oggetto di modifica senza preavviso